

HLS 820



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance 8 ohms
- Max Amp Power 250 watts
- Frequency Response 40Hz - 20kHz (± 3 dB)
- Sensitivity 90 dB (1 watt @ 1 meter)
- Crossover Frequency 2600 Hz

SYSTEM COMPONENTS:

- Cabinet HLS 820 (Not For Sale)
- Grille 332711-001
- Low Frequency Transducer* (2) 8" Polypropylene, Shielded (332653-001)
- DC Resistance 10.8 ohms $\pm 10\%$
- High Frequency Transducer* 10mm Polycarbonate Dome (TW010B17/101829B)

SYSTEM COMPONENTS: (cont.)

- DC Resistance 5.5 ohms $\pm 10\%$
- Crossover Network 332715-002

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 6.0V Input 40 Hz to 20 kHz
- L.F. Aural Sweep Test 6.0V Input 30 Hz to 3 kHz
- H.F. Aural Sweep Test 2.83V Input 2 kHz to 20 kHz


PHYSICAL SPECIFICATIONS

- Enclosure dimensions: 39 3/4 x 9 3/4 x 11 7/16" (H x W x D) 1010 x 248 x 290mm
- Weight 39 lbs. (17.7kg) Each


WARRANTY:

- Refer to Warranty Statement packed with each product.


PACKAGING

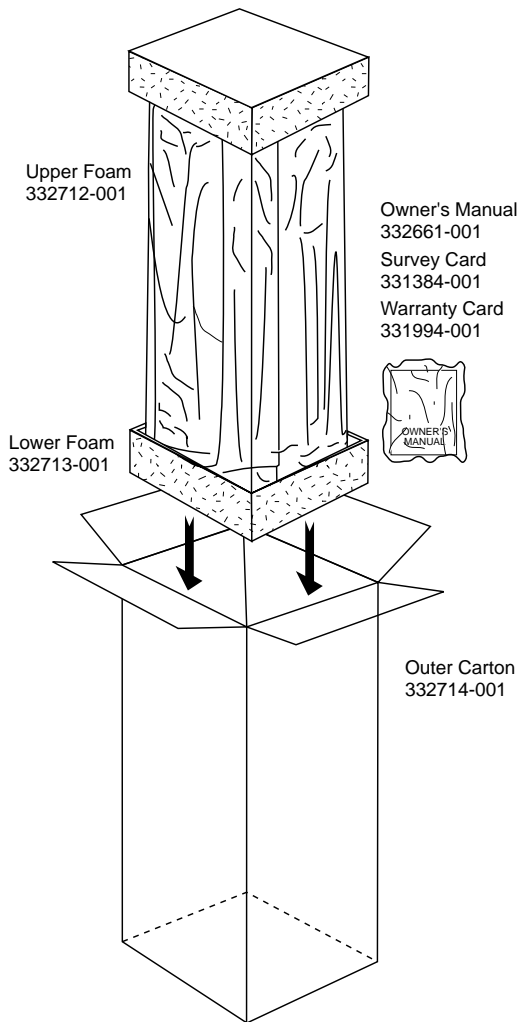

WIRING DIAGRAM

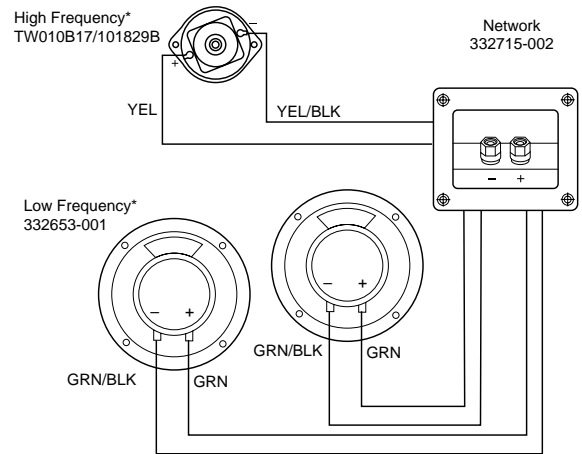

HLS 820 SCHEMATIC

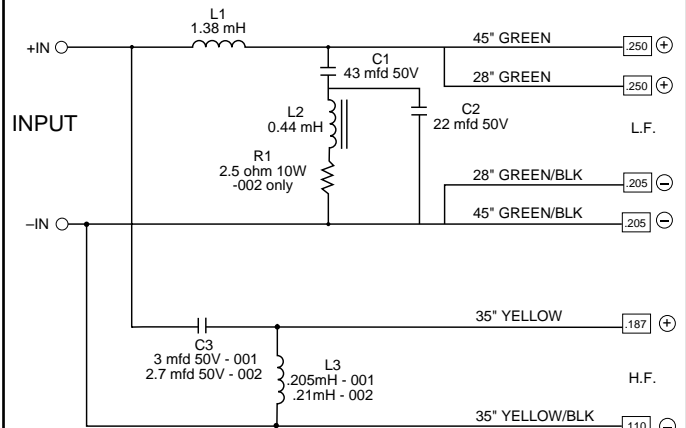


HLS 820

HLS 820



COMPONENT EXPLODED VIEW

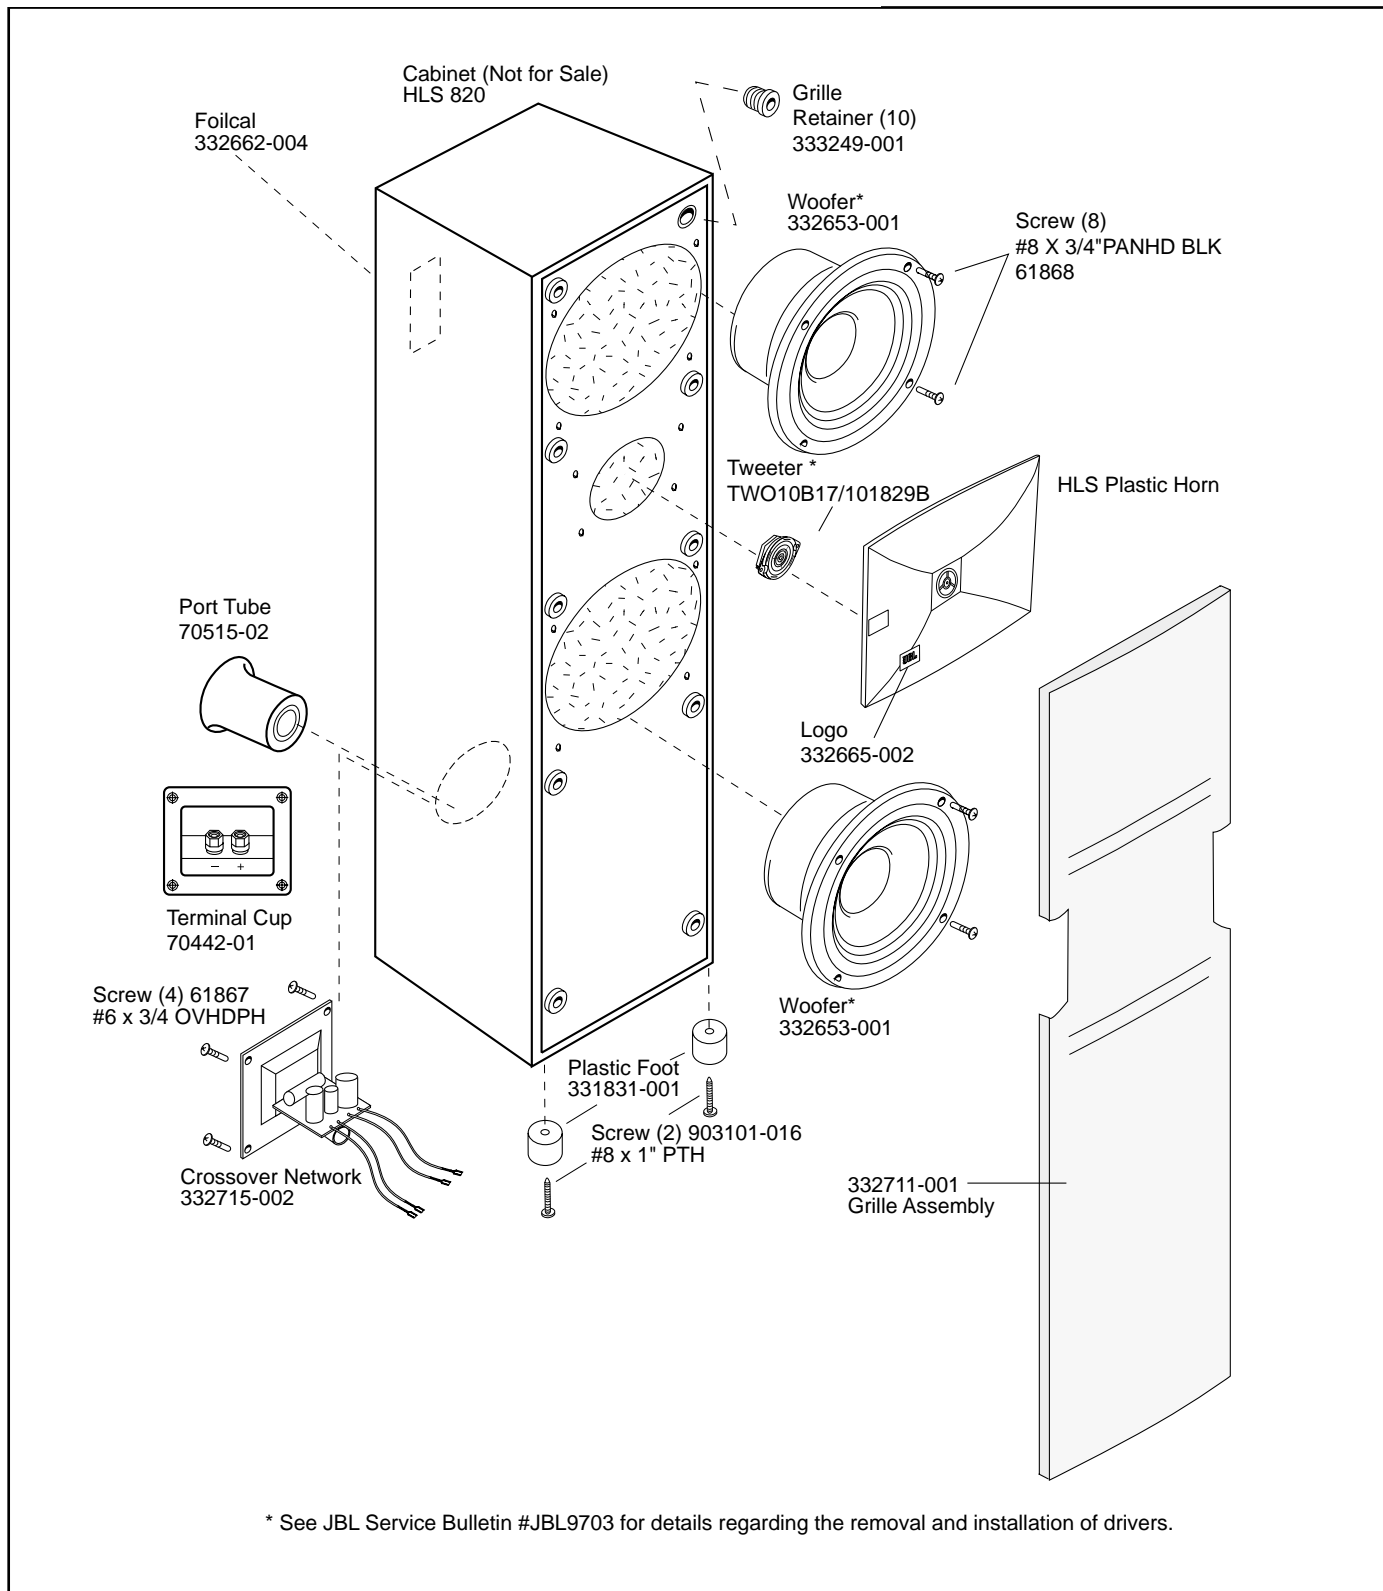

HLS 820